

# Engineered Filtration

Systems

## GDX/GDS PRE-FILTER WRAP

### Description

GDX/GDS pre-filter wraps add an additional stage of filtration and extend the service life of the primary/final filter. These medium efficiency polyester pre-filters are designed to capture large particles, airborne fibers, seeds, insects, etc., before they reach the final filter.

GDX/GDS pre-filter wraps are comprised of 100% non-shedding, gradient density poly-propylene fibers which makes them ideal for wet/high-moisture environments.


Single piece design of GDX/GDS cartridge wrap allows for easy installation and change out during operation. For use with any GDX/GDS conical, cylindrical cartridge/canister filter.

For use with Donaldson (P19\* series) GDS-II, GDS-I, GDX, AAF (DuraShield, HydroKlean & DuraKlean), Camfil Farr (CamPulse EF, CY-2612/CO-2612), EFS (GDX), GE (Altair), Pneumafil (Matrex, Pneuma-Pulse, etc.), TDC (BX, SX, QX, TW, CX, etc.), TVS (various), Viledon (TFP90), and equivalent brands cartridge/canister filters.

\* Part numbers: P19 series (P19-1961, P19-1962, P19-1177, P19-1178, P19-1280, P19-1281, etc.)



### Resistance Curve

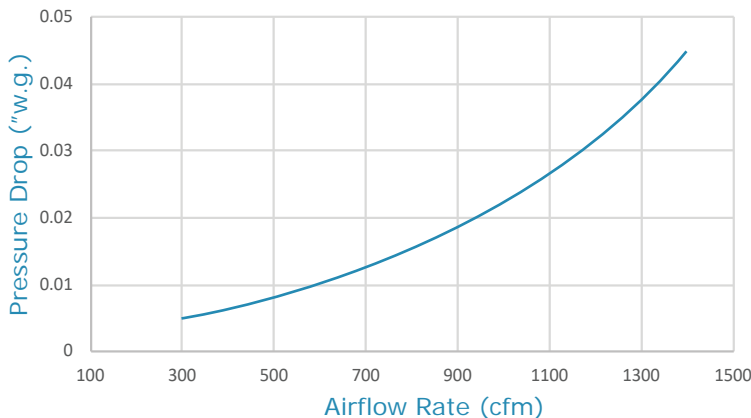

### Features

- Easy to install, low initial pressure drop.
- Excellent water coalescence ideal for high-moisture environments.
- Extend the life of the final filter, minimal effects on system delta P.
- Minimize spikes in pressure drop during fog/rain events.

<b>Efficiency</b>	G4 according to EN779
<b>Rel. Humidity</b>	100%
<b>Media Area</b>	8.67 - 9.80 ft <sup>2</sup> (0.8 - 0.91 m <sup>2</sup> )
<b>Pressure Drop</b>	0.050" wc at 1472 cfm
<b>Sizes</b>	Available for all GT cartridge sizes
<b>Designed For</b>	Standard GDS/GDX conical and cylindrical filter parts
<b>Outer Layer Media</b>	Single layer, medium efficiency, coalescing, high-loft synthetic media
<b>Inner Layer Media</b>	Multi-layer, higher efficiency coalescing synthetic media
<b>Installation</b>	Use of telescopic installation tool allows for changeout during operation; no need to remove final filters to install pre-filters.

cfm	"w.g.
295	.008"
600	.014"
890	.020"
1180	.030"
1400	.050"
1780	.065"

PART NO.	LENGTH	DONALDSON EQUIV.	FOR USE WITH
F-SOCK-GDX	52"	P03-9131 & P03-9132	GDS/GDX conical & cylindrical filters**

**PRE**

\*Optional Installation Tool Available

For your nearest dealer call:  
1.800.796.4EFS (4337)  
EngineeredFiltrationSystems.com

Engineered Filtration  
Systems

GDX/GDS PRE-FILTER WRAP